

Moulded 1 Phase EI Transformer

Standard moulded 1 phase EI transformers with screw connectors and DIN rail TS35 mount designed according to the following specifications.

- High quality safety and isolating transformers designed for use in general applications
- Standard primary winding 230VAC
- Encapsulated in resin
- Detailed product specification on permanent label
- High efficiency, low regulation design
- 100% electrical and flash tested




Specifications

Power: 12 - 100 VA
Frequency: 50/60 Hz
Primary: 230 VAC
Secondary: 6, 9, 12, 24, 48, 115, 230 VAC
Isolation: 4 kV RMS
Temp. class: B (130°)
According to: EN61558



Technical specification

Power	Overall Size
[VA]	L x W x H [mm]
12	54 x 87 x 44
20	60 x 90 x 50
30	66 x 94 x 58
50	72 x 96 x 65
63	85 x 104 x 74
80	85 x 104 x 74
100	85 x 104 x 74

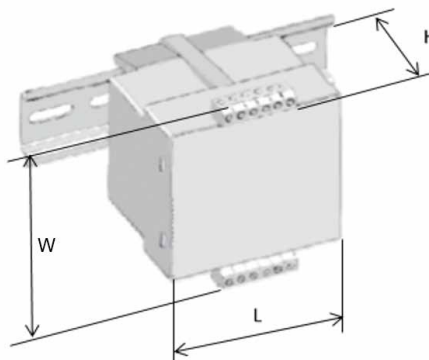

Power [VA]	Prim.[V]	Secondary [V]							
12	230V	6	9	12	24	42	48	115	230
20		6	9	12	24	42	48	115	230
30		6	9	12	24	42	48	115	230
50		6	9	12	24	42	48	115	230
63		6	9	12	24	42	48	115	230
80		6	9	12	24	42	48	115	230
100		6	9	12	24	42	48	115	230

Subject to errors and changes in product specifications.